BURRI public elements Deutschland GmbH

8152 Glattbrugg/Zürich CH/Int. +41 44 874 44 22

41066 Mönchengladbach DE +49 21 61 400 72 40

info@burriag.com

info@burripe.de

Vivax

Understated design for utmost versatility



The Vivax seating system is impressive for its classic, spirited shape. Not without reason, because the design and building philosophy of the popular Landi bench of bent steel tubes formed the basis for designer **Daniel Hunziker. Product-spanning** slatted sections and tubular sections allow the various elements of the Vivax system to speak the same language for easier maintenance in public spaces and lower service-life costs.

The clever design of the Vivax gives a new but timeless impression, without compromising ergonomics, usability and maintenance. The system is available in durable and refined NATWOOD.

Design: Daniel Hunziker

Construction

- Hot-dip galvanised, tubular steel frame, powder-coating available on request
- NATWOOD or larch seat slats

Other types of wood and colours available on request.


Installation

- Freestanding
- Anchored to a finished surface/concrete
- In-ground resting on a concrete foundation

Models

Vivax chair, with armrest Vivax chair, without armrest Vivax bench, 1200 mm, with armrest Vivax bench, 1200 mm, without armrest Vivax bench, 2200 mm, with armrest Vivax bench, 2200 mm, without armrest Vivax stool Vivax side-table Vivax recliner

Technical data overleaf. Prices according to price list.

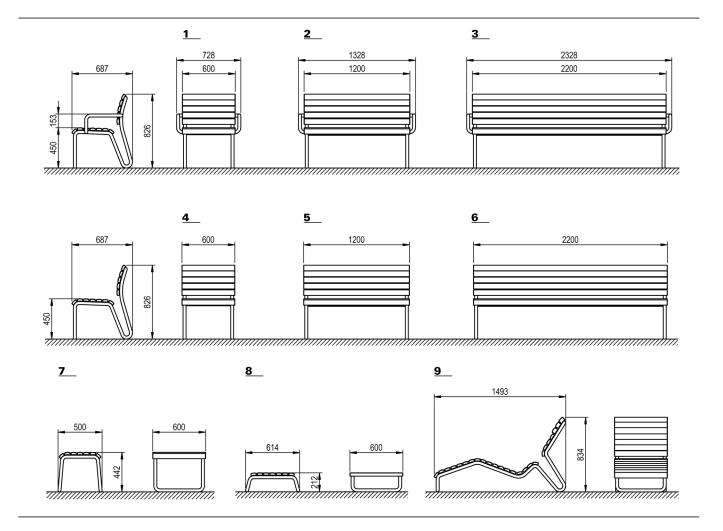

1 Vivax chair, with armrest

- Length: 600 mm Weight: 24 kg

2 Vivax bench, with armrest, short

- Length: 1200 mm
- Weight: 42 kg

3 Vivax bench, with armrest, long

- Length: 2200 mm
- Weight: 67 kg

Vivax chair, without armrest

- Length: 600 mm
- Weight: 21 kg

5 Vivax bench, without armrest, short

- Length: 1200 mm
- Weight: 39 kg

6 Vivax bench, without armrest, long

- Length: 2200 mm - Weight: 63 kg

7 Vivax stool

- Length: 600 mm
- Weight: 13 kg

8 Vivax side-table

- Length: 600 mm
- Weight: 11 kg

9 Vivax recliner

- Weight: 35 kg

- Length: 600 mm

Installation

- Freestanding on a hard surface
- Anchored to a finished surface/concrete
- In-ground resting on a concrete foundation

Construction

- Hot-dip galvanised, tubular steel frame
- Stainless steel connectors
- Powder-coating available on request
- NATWOOD® slats (thermo ash finish) Untreated larch
- Other types of wood and colours available on request